

C92

ESPECIFICACIONES INSTALACIÓN INSTALLATION FEATURES

Instalación <i>Installation</i>	Sobreponer <i>Surface Mounting</i>
Reversible <i>Reversible</i>	No <i>No</i>
Alto <i>Height</i>	140 mm
Ancho <i>Width</i>	86 mm
Profundo <i>Depth</i>	44 mm
Ciclos testados <i>Tested cycles</i>	200.000
Rango temperatura trabajo <i>Operating temperature</i>	-10°C/50°C


Cierre automático <i>Automatic closing</i>	Sí <i>Yes</i>
Apertura <i>Opening</i>	Llave <i>Key</i>
Gatillo interior <i>Catch on the inside</i>	No <i>No</i>
Antipalanca <i>Antileverage</i>	Sí <i>Yes</i>

PLANO TÉCNICO TECHNICAL DRAW

CILINDRO REDONDO
ROUND CYLINDER



LLAVE SERRETA
SERRATED KEY

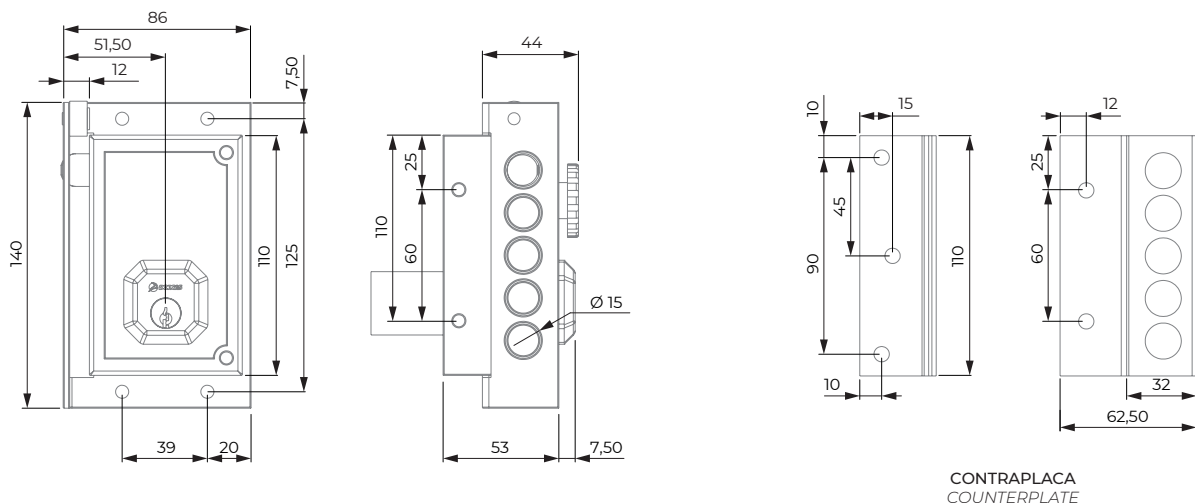

CONTRAPLACA
COUNTERPLATE

