

66 ND

Negro Black Gris Grey Marrón Brown


ESPECIFICACIONES INSTALACIÓN

INSTALLATION FEATURES

Instalación Installation	Sobreponer Surface-mounted	Profundidad aleta Jaw deep	10 mm
Reversible Reversible	Sí Yes	Ajuste aleta flex Flex jaw adjust	No No
Alto High	132 mm	Ciclos testeados Tested cycles	250.000
Ancho Width	51,50 / 24,10 mm	Rango temperatura trabajo Temperature working range	-25°C / 50°C
Profundo Deep	62 / 59 mm	Resistencia a rotura Breaking resistance	2.950N / 300 Kg

PLANO TÉCNICO

TECHNICAL DRAW

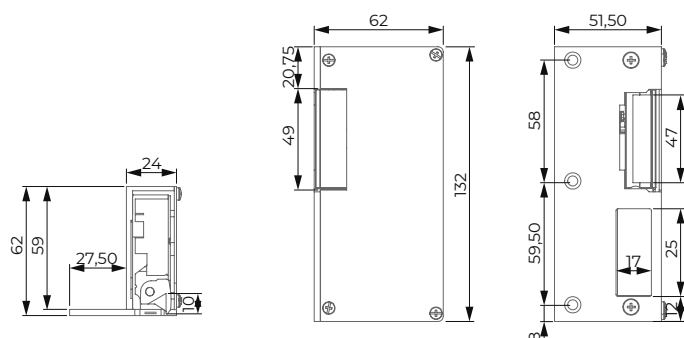

FUNCIONES

FUNCTIONS

Automático Delay action	No No
Desbloqueo Unlatching	Sí Yes
Microswitch (305) Microswitch (305)	No No
Diodo Diode	Opcional Optional
Varistor Varistor	Opcional Optional

ESPECIFICACIONES ELÉCTRICAS

ELECTRIC FEATURES

RANGO VOLTAJE (V) VOLTAGE RANGE (V)	6-12	8-12	24	12 (412)	24 (424)	12 (512)	24 (524)
	AC-DC	AC-DC	AC-DC	DC	DC	DC	DC
FUNCIONAMIENTO FUNCTIONMENT	FAIL SECURE	FAIL SECURE	FAIL SECURE	FAIL SECURE	FAIL SECURE	FAIL SAFE	FAIL SAFE
RESISTENCIA BOBINA (Ω) COIL RESISTANCE (Ω)	8	17	58	68	220	68	220
CICLO CARGA ELÉCTRICA (%ED) ELECTRIC DUTY CYCLE (%ED)	10% ED	20% ED	20% ED	100% ED 12 VDC	100% ED 24 VDC	100% ED 12 VDC	100% ED 24 VDC
CONSUMO CORRIENTE AC (mA) AC CURRENT CONSUMPTION (mA)	565 (6V) 1150 (12V)	350 (8V) 510 (12V)	340	-	-	-	-
CONSUMO CORRIENTE DC (mA) DC CURRENT CONSUMPTION (mA)	750 (6V) 1500 (12V)	490 (8V) 715 (12V)	410	210	120	190	120
MÁXIMA PRECARGA APERTURA AC MAXIMUM PRELOAD OPEN AC	-	-	-	-	-	-	-
MÁXIMA PRECARGA APERTURA DC MAXIMUM PRELOAD OPEN DC	-	-	-	-	-	-	-
TOLERANCIA BOBINA COIL TOLERANCE	Máxima tolerancia bobina 5% Max coil tolerance 5%						

