


# SERIE **M600**

	Instalación <i>Installation</i>	LED <i>LED</i>	Monitorización (Estado de sistema) <i>Monitoring (System status)</i>	Monitorización (Estado de puerta) <i>Monitoring (Door status)</i>	Temporización <i>Time delay</i>	Alimentación <i>Power supply</i>
<b>M600 RLS</b>	Sobreponer <i>Surface-mounted</i>	✓	✓			12/24* VDC
<b>M600 RTLS</b>	Sobreponer <i>Surface-mounted</i>	✓	✓		✓	12/24* VDC
<b>M600 RTL2S</b>	Sobreponer <i>Surface-mounted</i>	✓	✓	✓	✓	12/24* VDC
<b>M600 WRS</b>	Sobreponer <i>Surface-mounted</i>	✓	✓			12/24* VDC
<b>M600 MS</b>	Embutir <i>Flush-mounted</i>	✓	✓			12/24* VDC

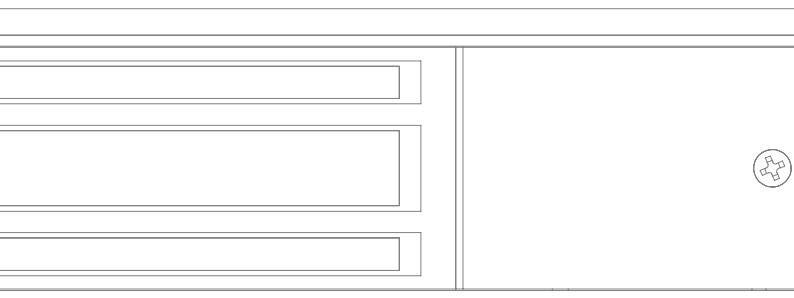


# M600 RLS

## ESPECIFICACIONES INSTALACIÓN INSTALLATION FEATURES

Instalación <i>Installation</i>	Sobreponer <i>Surface Mounting</i>
Alto <i>High</i>	44 mm
Ancho <i>Width</i>	250 mm
Profundo <i>Deep</i>	27,50 mm

LED <i>Led</i>	Sí <i>Yes</i>
Monitorización <i>Monitoring</i>	*Sí <i>*Yes</i>
Temporización <i>Time delay</i>	No <i>No</i>
Temperatura trabajo <i>Temperature working</i>	-60°C / +50°C

## PLANO TÉCNICO TECHNICAL DRAW

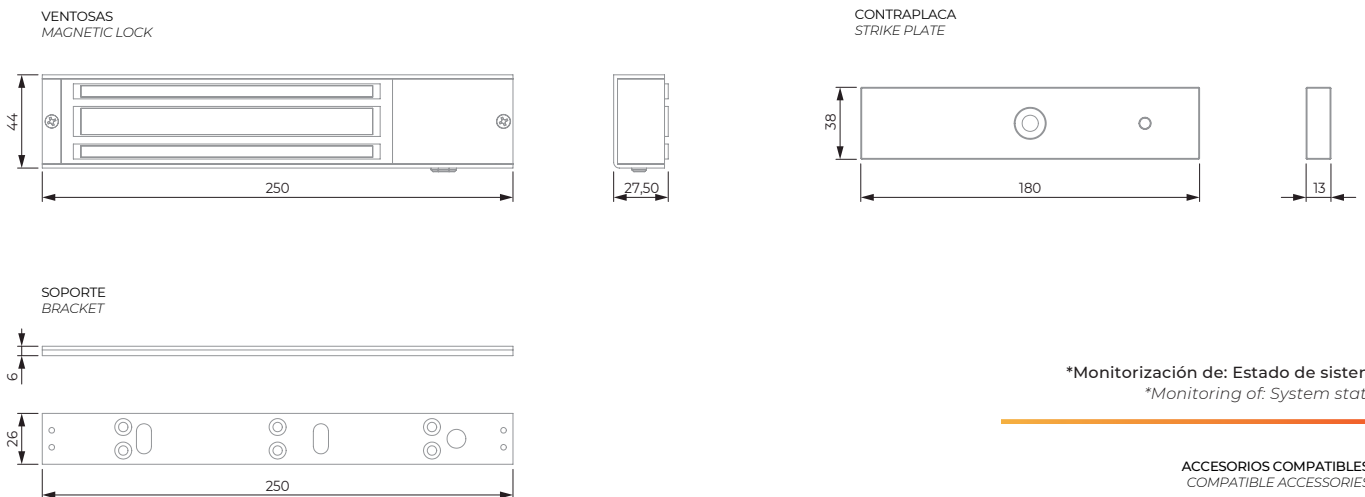

\*Monitorización de: Estado de sistema.  
\*Monitoring of: System status.

ACCESORIOS COMPATIBLES  
COMPATIBLE ACCESSORIES

L600 SOPORTE  
L600 BRACKET

LC600 SOPORTE  
LC600 BRACKET

F600 SOPORTE  
F600 BRACKET

Z600 SOPORTE  
Z600 BRACKET

ZLC600 SOPORTE  
ZLC600 BRACKET

U600 PUERTAS DE CRISTAL  
U600 GLASS DOORS

## ESPECIFICACIONES ELÉCTRICAS ELECTRIC FEATURES

MODELO <i>MODEL</i>	M120	M300	M600	M1200
RETENCIÓN <i>HOLDING FORCE</i>	120lb (60kg)	300lb (180kg)	600lb (280kg)	1200lb (500kg)
ALIMENTACIÓN <i>POWER SUPPLY</i>	12VDC	12-24VDC	12-24VDC	12-24VDC
CONSUMO DE CORRIENTE (mA) <i>CURRENT CONSUMPTION (mA)</i>	130	310-170	400-200	400-200

