


SERIE **M600**

	Instalación <i>Installation</i>	LED <i>LED</i>	Monitorización (Estado de sistema) <i>Monitoring (System status)</i>	Monitorización (Estado de puerta) <i>Monitoring (Door status)</i>	Temporización <i>Time delay</i>	Alimentación <i>Power supply</i>
M600 RLS	Sobreponer <i>Surface-mounted</i>	✓	✓			12/24* VDC
M600 RTLS	Sobreponer <i>Surface-mounted</i>	✓	✓		✓	12/24* VDC
M600 RTL2S	Sobreponer <i>Surface-mounted</i>	✓	✓	✓	✓	12/24* VDC
M600 WRS	Sobreponer <i>Surface-mounted</i>	✓	✓			12/24* VDC
M600 MS	Embutir <i>Flush-mounted</i>	✓	✓			12/24* VDC

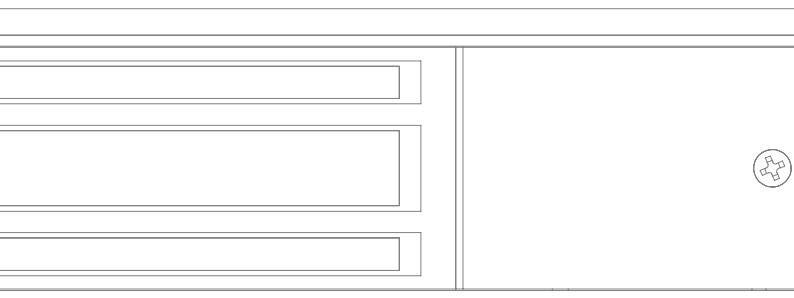


M600 RTLS

ESPECIFICACIONES INSTALACIÓN INSTALLATION FEATURES

Instalación <i>Installation</i>	Sobreponer <i>Surface Mounting</i>
Alto <i>High</i>	44 mm
Ancho <i>Width</i>	250 mm
Profundo <i>Deep</i>	27,50 mm

LED <i>Led</i>	Sí <i>Yes</i>
Monitorización <i>Monitoring</i>	*Sí <i>*Yes</i>
Temporización <i>Time delay</i>	Sí <i>Yes</i>
Temperatura trabajo <i>Temperature working</i>	-60°C / +50°C

PLANO TÉCNICO TECHNICAL DRAW

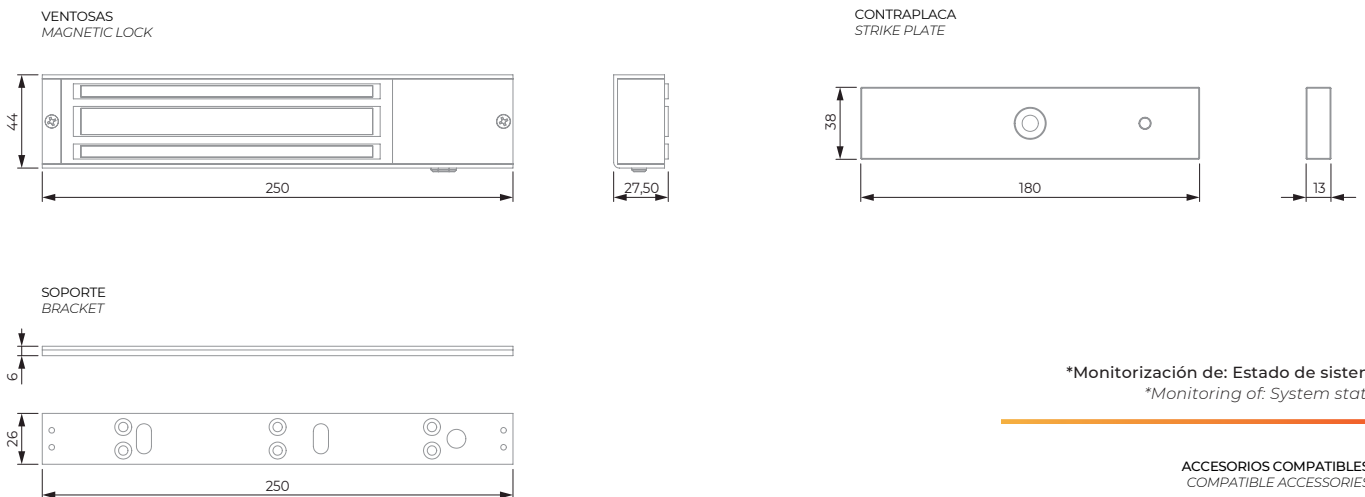

*Monitorización de: Estado de sistema.
*Monitoring of: System status.

ACCESORIOS COMPATIBLES COMPATIBLE ACCESSORIES

L600 SOPORTE
L600 BRACKET

LC600 SOPORTE
LC600 BRACKET

F600 SOPORTE
F600 BRACKET

Z600 SOPORTE
Z600 BRACKET

ZLC600 SOPORTE
ZLC600 BRACKET

U600 PUERTAS DE CRISTAL
U600 GLASS DOORS

ESPECIFICACIONES ELÉCTRICAS ELECTRIC FEATURES

MODELO <i>MODEL</i>	M120	M300	M600	M1200
RETENCIÓN <i>HOLDING FORCE</i>	120lb (60kg)	300lb (180kg)	600lb (280kg)	1200lb (500kg)
ALIMENTACIÓN <i>POWER SUPPLY</i>	12VDC	12-24VDC	12-24VDC	12-24VDC
CONSUMO DE CORRIENTE (mA) <i>CURRENT CONSUMPTION (mA)</i>	130	310-170	400-200	400-200

